

GENERAL

The Badger Meter Model 3000 Flow Monitor is an economical full featured compact unit designed for flow measurement applications, and general hydronic thermal transfer systems. Outputs include one mechanical relay and one solid-state pulse output, both featuring unit/pulse and set-point control independently based on flow or total readings. Also driven by the same variables, an optional Analog 4-20mA or 0-20mA output is provided. Additionally, the optional USB, RS-485 MODBUS, and BACnet/MSTP provide high-level communication.

A two line by 16-character 3/8" high backlit LCD display is configured by the user to display flow rate, flow total. In addition to many pre-programmed units of measure, many custom units can be created during field set-up.

The flow sensor input features flexible scaling options and signal type selections that permit the use of most Badger Meter sensors, or other frequency sine/pulse or linear analog devices.

PROGRAMMING

Programming is very easy and can be done using the five front panel push buttons, or by using Windows® based software via a USB port.



OPTIONS

NEMA4x panel mount conforms to DIN standard 96 mm x 96 mm for meter size and cutouts. NEMA4x wall mount is available as an option.



Advanced features include the following:

1. Infinite Impulse Response Filter (IIRF) smooths the flow rate, temperature, and energy rate calculations. This proprietary smoothing software provides accurate calculations by compensating for a wide variety of flow signal variables.
2. Password restricted access to programming, reset total, or both.
3. Non-volatile memory of totals and field configuration, without need for battery backup.
4. Efficient switching power supply permits 12-24VAC/DC operations.

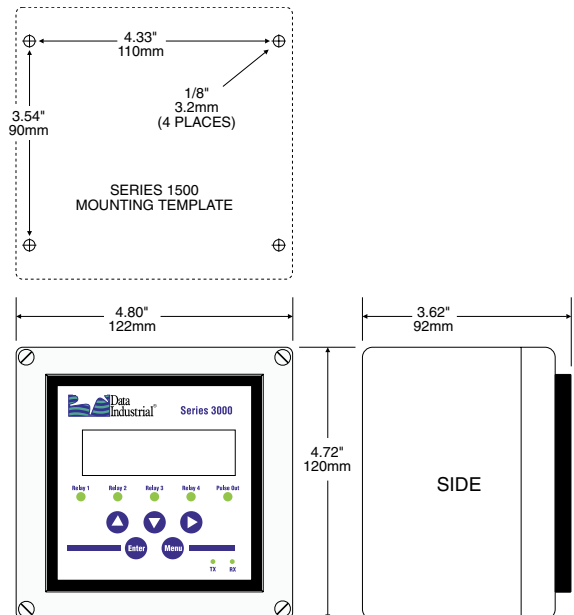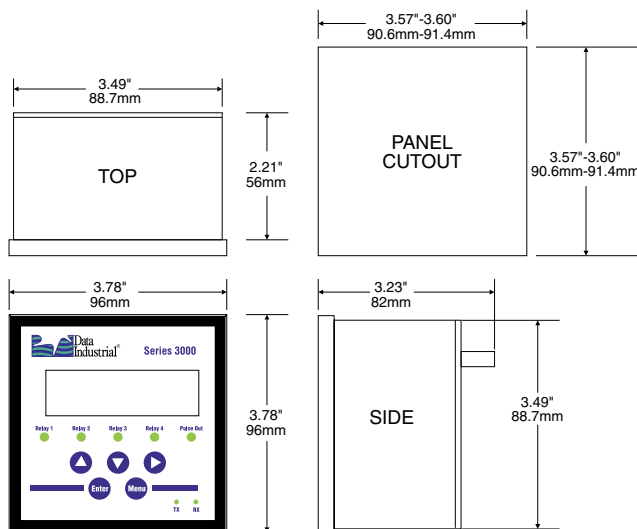

Flow Sensor Inputs

Type	Threshold	Signal Limit	Frequency	Pull-up	Impedance	Aux. Power	Calibration
Pulse-DI	2.5 VDC	30VDC	0.4Hz to 10kHz	1K to 12VDC	-	12VDC@30mA	K + Offset
Pulse-K Factor	2.5 VDC	30VDC	0.4Hz to 10kHz	-	-	12VDC@30mA	Pulse/Gal
Pull-up-K Factor	2.5 VDC	30VDC	0.4Hz to 10kHz	1K to 12VDC	-	12VDC@30mA	Pulse/Gal
Sine-K Factor	10mVPP	30VDC	0.4Hz to 10kHz	-	10k Ω	12VDC@30mA	Pulse/Gal
Analog – 4-20mA	-	50mA Fused	-	-	100 Ω	12VDC@30mA	Linear
Analog – 0-20mA	-	50mA Fused	-	-	100 Ω	12VDC@30mA	Linear
Analog – 0-1 VDC	-	30VDC	-	-	100k Ω	12VDC@30mA	Linear
Analog – 0-5 VDC	-	30VDC	-	-	100k Ω	12VDC@30mA	Linear
Analog – 0-10 VDC	-	30VDC	-	-	100k Ω	12VDC@30mA	Linear

Rate Units of Measure: GPM; gal/sec; gal/hr; Mgal/day; LPS; LPM; LPH; ft3/Sec; ft3/min; ft3/hr; m3/sec; m3/min; m3/hr; acre-ft/sec; acre-ft/min; acre-ft/hr; bbl/sec; bbl/min; bbl/hr; and field programmed custom units 0.00 to 999999999

Total Units: gallons; Mgal; liters; ft3; m3; acre-ft; bbl; and field programmed custom units 0.00 to 999999999

SPECIFICATIONS

Voltage

12-24 VDC / VAC
(Limit: 8-35VDC)
(Limit: 8 – 28VAC)

DC current draw (~280mA)
AC power rating (~5 VA)

Display

16 character by two line alphanumeric dot matrix 7.95mm high backlit LCD

Operating Temperature

-20°C to +70°C

Storage Temperature

-30°C to +80°C

Dimensions

Panel Mount:

3.78"W x 3.78"H x 3.23"D
(96mm x 96mm x 63mm)

Wall Mount:

4.80"W x 4.72"H x 3.63"D
(120mm x 120mm x 92mm)

Weight:

panel mount 12 oz

Pulse and Relays

Both pulse and relay are fully functional as either totalizing, or set-point outputs.

Pulse Electrical

1 Amp @ 35VDC/ 30VAC
Closed: 0.5Ω @ 1 AMP Open: >10⁸Ω

Relay Electrical

Resistive load: 5Amp @ 120VAC/30VDC
Inductive load: 1Amp @ 120VAC/30VDC

Pulse/Unit Volume (Totalizer)

Driving Source: flow total; Btu total
Units: any predefined or custom unit
Rate: 1 Pulse per 1.0000000 to 99999999 units
Contact Time: 1 to 9999 mS

Set-Point (Alarm)

Driving Source: flow rate; Btu rate; temperature 1; temperature 2, delta T
Units: Any predefined or custom unit
Set-Point: 1.0000000 to 999999999
Delay to Set: 1 to 9999 Seconds
Release-Point: 1.0000000 to 999999999
Delay to Release: 1 to 9999 seconds

Optional Analog Output

Driving Source: flow rate; PID control
Range: 4-20mA; 0-20mA (isolated current sinking or sourcing)
Sinking: 30VDC @ 0mA maximum; 3 volts @ 20mA minimum
Sourcing: 600 W maximum load

USB Communication

Provides complete access to all programming and operation features.
Requirements:
USB 2.0 A to Mini-B 5-Pin Cable (example: SYSONIC model UAM56 GWT/B)

RS-485 Communication

Supports: Modbus and BACnet/MSTP

Accessories

Programming kit
Wall mount kit

Series	Example:	3000	-	x	x
Flow Monitor	3000				
Option - Analog Output, RS485 (BACnet / Modbus), and USB					
No Option				0	
Analog Output, RS485 with BACnet and Modbus, and USB				1	
Option - Mounting					
Panel Mount					0
Wall Mount					1

Model 3000 Ordering Matrix

Windows® is a registered trademark of Microsoft Corporation.



Please see our website at www.dataindustrial.com for specific contacts.

Copyright © Badger Meter, Inc. 2008. All rights reserved.

Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists.



BadgerMeter, Inc.

P.O. Box 581390, Tulsa, Oklahoma 74158
(918) 836-8411 / Fax: (918) 832-9962
www.dataindustrial.com